


ITEM	DESCRIPTION
1	HV CABLE BOX 3 POLE 1 GLAND (TERMINATION KIT REQD)
2	LV CABLE BOX 4 POLE 14 GLAND AIR FILLED
3	TRANSFORMER OIL FILLER COVER PLATE
4	THERMOMETER POCKET
5	LIQUID LEVEL GAUGE
6	JACKING ANGLES
7	EARTHING TERMINAL ONE EACH SIDE
8	SKID UNDERBASE C/W HAULAGE HOLES
9	MAIN LIFTERS
10	BREATHER PIPE C/W SILICA GEL BREATHER
11	TAPPING SELECTOR CONTROL HANDLE
12	RATING AND DIAGRAM PLATE
13	DRRAIN VALVE
14	RADIATORS

BOWERS JOB No.	TR61639 and TR61640	ESTIMATED WEIGHTS	KG
BOWERS STOCK No.	2000 KVA	CORE AND WINDINGS	2375
VOLTRAGE RATIO	11000 / 433	COOLING LIQUID 1017 LTRS	871
AMPERES	104.96 / 2666	TOTAL WEIGHT	4600
PHASES	3		
FREQUENCY	50HZ		
VECTOR SYMBOL	Dyn11		

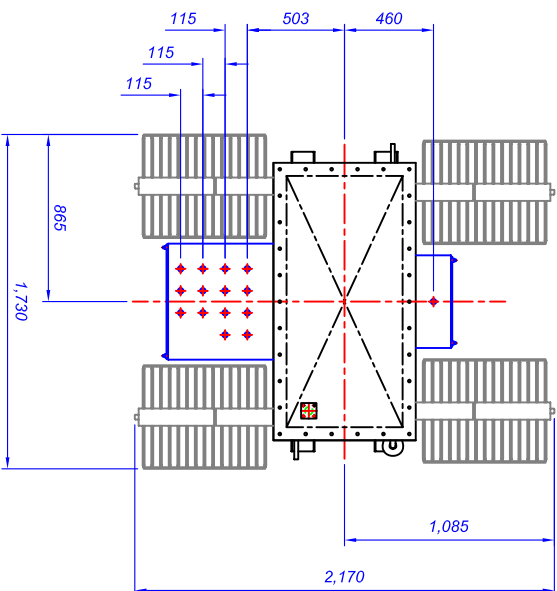

This drawing is COPYRIGHT and the property of Bowers Electrical Ltd. It must not be copied (in whole or in part) without prior written consent of the company.

TOLERANCE UNLESS OTHERWISE STATED:  
 ± 0.5mm FOR DIMENSIONS UP TO 250mm  
 ± 1.0mm FOR DIMENSIONS UP TO 1000mm  
 ± 2.0mm FOR DIMENSIONS OVER 1000mm.

Rev/No	Date	Signed	Ckd.

**Bowers Electrical Ltd**  
 Heaton Dale Road, D27E 7GX  
 Tel: 01773 531531 Fax: 01773 716171  
 Email: enquiries@bowerselec.co.uk

Drawn by	CH/ESSE	Checked by	D/RESBITT	Approved by	AS	Orig. Job No.	1009517	Date	16/09/17	Dwg. Size	A2
GENERAL ARRANGEMENT OF 2000KVA OLVAN TRANSFORMER TO BSEN60076											
DRG No. BE5327											
FIRST ANGLE											
Scale	1:20	Revision	0	Sheet	181						